

FIXED AUTOMATIC HOSE REELS IN AISI 304 STAINLESS STEEL FOR WATER 150 °C 200 bar

Equipped with:

- Blue no trace synthetic rubber hoses 1SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Viton® seals



FX-400

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2205-300	without hose	-	-	F1/2"G - M3/8"G
070-2205-400	without hose	-	-	F1/2"G - M1/2"G
070-2204-210	10 m	5/16"	200 bar	F1/2"G - F3/8"G
070-2204-215	15 m	5/16"	200 bar	F1/2"G - F3/8"G
070-2204-310	10 m	3/8"	200 bar	F1/2"G - F3/8"G
070-2204-410	10 m	1/2"	200 bar	F1/2"G - F1/2"G



FX-460

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2305-300	without hose	-	-	F1/2"G - M3/8"G
070-2305-400	without hose	-	-	F1/2"G - M1/2"G
070-2304-220	20 m	5/16"	200 bar	F1/2"G - F3/8"G
070-2304-315	15 m	3/8"	200 bar	F1/2"G - F3/8"G
070-2304-318	18 m	3/8"	200 bar	F1/2"G - F3/8"G
070-2304-415	15 m	1/2"	200 bar	F1/2"G - F1/2"G



FX-550

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2405-300	without hose	-	-	F1/2"G - M3/8"G
070-2405-400	without hose	-	-	F1/2"G - M1/2"G
070-2404-320	20 m	3/8"	200 bar	F1/2"G - F3/8"G
070-2404-325	25 m	3/8"	200 bar	F1/2"G - F3/8"G
070-2404-420	20 m	1/2"	200 bar	F1/2"G - F1/2"G
070-2404-425	25 m	1/2"	200 bar	F1/2"G - F1/2"G



FX-555


Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2505-300	without hose	-	-	F1/2"G - M3/8"G
070-2505-400	without hose	-	-	F1/2"G - M1/2"G
070-2504-330	30 m	3/8"	200 bar	F1/2"G - F3/8"G
070-2504-430	30 m	1/2"	200 bar	F1/2"G - F1/2"G






FX-560

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2605-400	without hose	-	-	F1/2"G - M1/2"G
070-2604-340	40 m	3/8"	200 bar	F1/2"G - F3/8"G
070-2604-350	50 m	3/8"	200 bar	F1/2"G - F3/8"G
070-2604-440	40 m	1/2"	200 bar	F1/2"G - F1/2"G

OVERALL DIMENSIONS FIXED VERSION

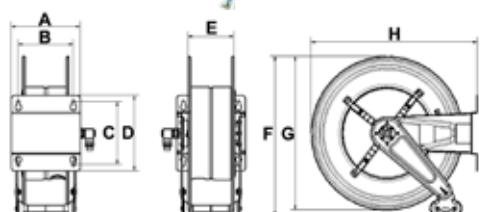

Mod.	A	B	C	D	E	F	G	H			
FX-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
FX-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
FX-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
FX-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1
FX-560	440	390	225	270	360	590	550	600	33,00<83,00	0,240	1

FIXED AUTOMATIC HOSE REELS IN AISI 304 STAINLESS STEEL FOR WATER 150 °C 400 bar

Equipped with:

- Blue no trace synthetic rubber hoses 2SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Viton® seals



FX-400

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2205-300	without hose	-	-	F1/2" G - M3/8" G
070-2205-400	without hose	-	-	F1/2" G - M1/2" G
070-2205-210	10 m	5/16"	400 bar	F1/2" G - F3/8" G
070-2205-215	15 m	5/16"	400 bar	F1/2" G - F3/8" G
070-2205-310	10 m	3/8"	400 bar	F1/2" G - F3/8" G
070-2205-410	10 m	1/2"	400 bar	F1/2" G - F1/2" G



FX-460

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2305-300	without hose	-	-	F1/2" G - M3/8" G
070-2305-400	without hose	-	-	F1/2" G - M1/2" G
070-2305-220	20 m	5/16"	400 bar	F1/2" G - F3/8" G
070-2305-315	15 m	3/8"	400 bar	F1/2" G - F3/8" G
070-2305-318	18 m	3/8"	400 bar	F1/2" G - F3/8" G
070-2305-415	15 m	1/2"	400 bar	F1/2" G - F1/2" G



FX-550

Articolo	L. tubo	Ø tubo	Pressione max	Entrata-Uscita
070-2405-300	without hose	-	-	F1/2" G - M3/8" G
070-2405-400	without hose	-	-	F1/2" G - M1/2" G
070-2405-320	20 m	3/8"	400 bar	F1/2" G - F3/8" G
070-2405-325	25 m	3/8"	400 bar	F1/2" G - F3/8" G
070-2405-420	20 m	1/2"	400 bar	F1/2" G - F1/2" G
070-2405-425	25 m	1/2"	400 bar	F1/2" G - F1/2" G



FX-555




Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2505-300	without hose	-	-	F1/2" G - M3/8" G
070-2505-400	without hose	-	-	F1/2" G - M1/2" G
070-2505-330	30 m	3/8"	400 bar	F1/2" G - F3/8" G
070-2505-430	30 m	1/2"	400 bar	F1/2" G - F1/2" G



FX-560

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2605-400	without hose	-	-	F1/2" G - M1/2" G
070-2605-340	40 m	3/8"	400 bar	F1/2" G - F3/8" G
070-2605-350	50 m	3/8"	400 bar	F1/2" G - F3/8" G
070-2605-440	40 m	1/2"	400 bar	F1/2" G - F1/2" G

OVERALL DIMENSIONS FIXED VERSION

Mod.	A	B	C	D	E	F	G	H			
FX-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
FX-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
FX-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
FX-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1
FX-560	440	390	225	270	360	590	550	600	33,00<83,00	0,240	1

